

DECBOARD™



TONGUE & GROOVE CEILING

FACING	WM/MN (White Mineral / Mineral Natural)
STANDARD WIDTHS	900mm/300mm
LENGTHS	Stock lengths
THICKNESS	30mm

FIXING DETAILS

Decoboard Between Truss (Exposed)

- Decoboard to be trimmed if necessary and then pressed fit between trusses. Board will be fastened using the concealed clip into battens or roof purlins at 600mm centers. Longitudinal sidelaps will be secured with clips and tongue and groove section.
- Quarter rounds to be used to finish the installation where the board meets the truss, to eliminate timber imperfections
- Excess dust to be removed before boards are painted
- Decoboard Tongue and Groove must be painted using a high-quality acrylic paint once installed.

Decoboard Ceilings Nailup

- Batten spacings should not exceed 600mm, Decoboard should be fastened using a concealed fixing clip to the battens and adhesive.
- Longitudinal side laps will be secured with clips and tongue and groove section
- Excess dust to be removed before boards are painted
- Decoboard Tongue and Groove must be painted using a high-quality acrylic paint once installed.

SPECIFICATION FOR BOQ





APPLICATION: STANDARD CEILING PINE FINISH (TONGUE & GROOVE) - ONLY 30MM

Decoboard by LAMBDA BOARD™ laminated polyisocyanurate core board with a minimum core density of 34kg/m³, minimum thickness of 30mm; in widths of 300mm or 900mm with a 1.25(Km²/W) R-Value. Finish shall be White Mineral and Mineral Natural laminated on each side with a White Mineral side displaying grooves. Decoboard to be mechanically fastened using concealed clip and adhesives into battens placed at 600mm centres. Side lap shall be interlocking joint using the Tongue and groove lap. Finished with one or two coats of high-quality acrylic paint, in accordance with manufactures specification.

SPECIFICATION FOR BOQ

APPLICATION: EXPOSED TRUSS CEILING PINE FINISH (TONGUE & GROOVE) - ONLY 30MM

Decoboard by LAMBDA BOARD™ laminated polyisocyanurate core board with a minimum core density of 34kg/m³, minimum thickness of 30mm; in widths of 300mm or 900mm with a 1.25(Km²/W) R-Value. Finish shall be White Mineral and Mineral Natural laminated on each side with a White Mineral side displaying grooves. Decoboard to be mechanically fastened using concealed clip and adhesives into battens / purlins placed at 600mm centres. Side lap shall be interlocking joint using the Tongue and groove lap. Finished with one or two coats of high-quality acrylic paint, in accordance with manufactures specification.

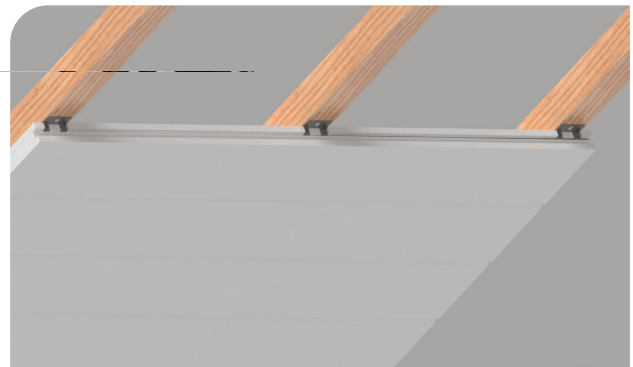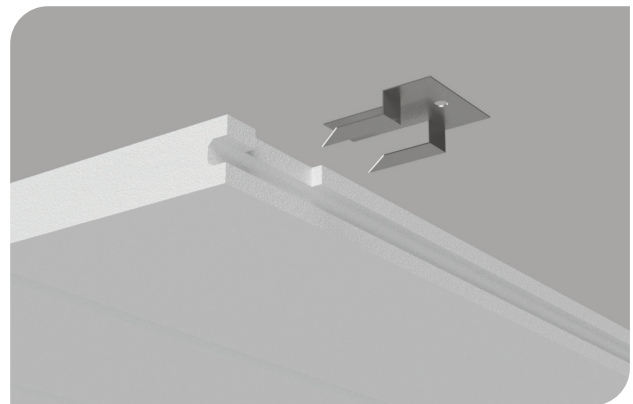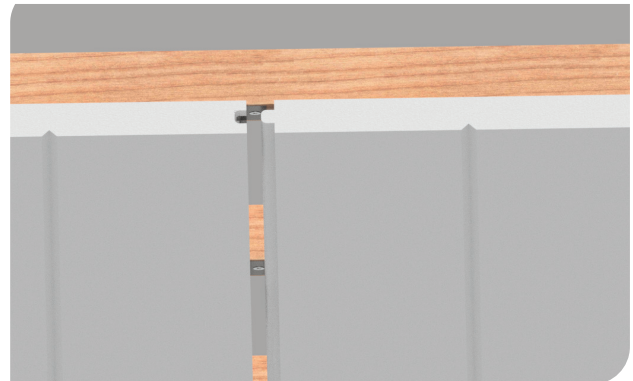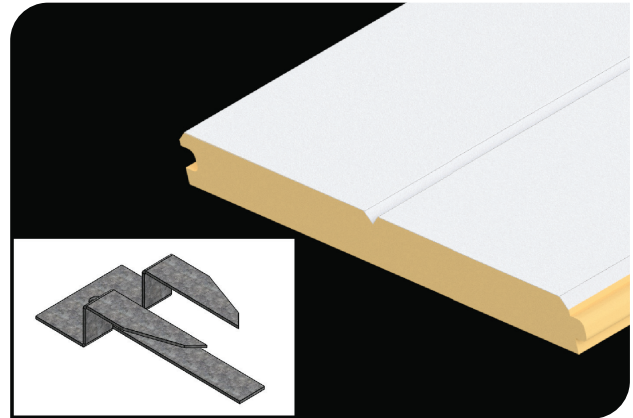

JOHANNESBURG

Tel: +27 (0)11 421 0313
Email: info@rigifoam.com

KWA-ZULU NATAL

Tel: +27 (0)31 700 5250
Email: tristan@rigifoam.com

PORT ELIZABETH

Tel: +27 (0)41 453 0277
Email: ronnie@rigifoam.com

CAPE TOWN - LAMBDA BOARD AGENT
Youngman's Roofing and Insulation

Tel: +27 (0)21 511 8125
Email: sonet@rigifoam.com

REV 2 August 2020

